

Feste Werkseinstellung, darf nicht verändert werden!
Fixed factory set, modifications are not allowed!

Werkstoffe:

Zangenkörper Werkzeugstahl 58 CrV4
Härte 45+ 4 HRC
Oberfläche verchromt

Crimpmatrizen Werkzeugstahl C 45
Härte 40 + 4 HRC
Oberfläche brüniert

Griffe PVC-Decilith

Standzeit:

40.000 - 50.000 Crimpungen
Nach jeweils 10.000 Crimpungen wird empfohlen, die Crimpmaße zu prüfen.

Gewicht:

Zange 785 g
Zange mit Koffer 1160 g

Kabel:

Crimpeinsatz für Kabeldurchmesser 5,5 bis 7,3 mm

Verpackung:

Kunststoff-Koffer-Set :

- 1 Zange mit Crimpeinsatz
- 1 Innensechskantschlüssel (SW 2,5 mm)
- 2 Ersatzschrauben (M4x10 / M4x16)
- 1 Montageanleitung

materials:

pliers body tool steel 58 CrV4
hardness 45+ 4 HRC
finish chrome plated

die set tool steel C 45
hardness 40 + 4 HRC
finish burnished

handholds PVC-Decilith

life cycles:

40.000 - 50.000 crimpings
It is recommended to check the crimp dimensions after 10.000 crimpings.

weight:

pliers 785 g
pliers with portable plastic case 1160 g



cable:

die set for cable diameter 5,5 bis 7,3 mm

packing:

portable plastic case :

- 1 pliers with die set
- 1 Allen key (2,5 mm)
- 2 Allen screws (M4x10 / M4x16)
- 1 assembly instruction

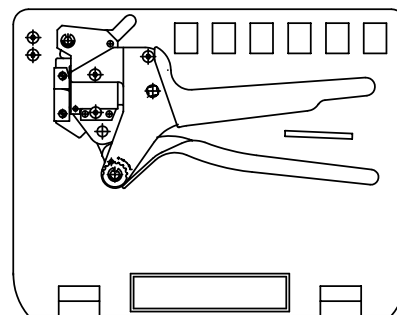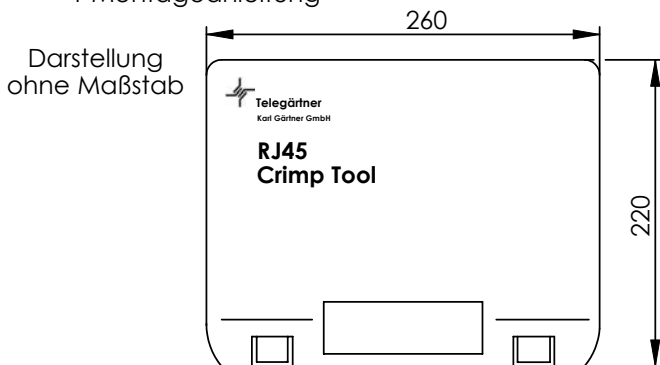

a	19037	23.07.07	SN	2005	Datum/ date	Name/ name	Gewicht/ weight [g]	Oberfläche/ surface [mm²]	Werkstoff/ material
				gez./ drawn	26.07	SN			
				gepr./ appr.	27.07.07	HI			Oberfläche/ finish
				Norm/ stand.					
				Maßstab/ scale	Benennung/ title				
				1:2	Crimpzange MP8 FS Crimp tool MP8 FS				
				untol. Maße/ dim. without tolerances according to	Untert./ doc. type	Zeichnungsnr./ drawing no.			
				D	N00001A0002				
									Original : DIN A4
									Blatt/ sheet 1 von/ of 1

